



VOL. 2 NO. 1 SEPTEMBER 2020  
E-ISSN 2686-3278

**PROCEEDING OF  
CONFERENCE ON  
MANAGEMENT AND  
ENGINEERING IN  
INDUSTRY (CMEI) 2020**

**BRIDGING TECHNOLOGY  
TOWARDS INDUSTRY 4.0**

**TANGERANG, 28 SEPTEMBER 2020**



**MASTER OF MECHANICAL ENGINEERING  
SWISS GERMAN UNIVERSITY**

## **Preface from the Chairman of the Conference on Management and Engineering in Industry (CMEI)**

**Dena Hendriana, B.Sc., S.M., Sc.D.**

*Head Department of Master of Mechanical Engineering, Faculty of Engineering and Information Technology, Swiss German University*

Welcome to the second Conference on Management and Engineering in Industry (CMEI). This conference is conducted by Master of Mechanical Engineering in the Swiss German University at Alam Sutera, Tangerang, Indonesia. The conference is open for all academic community to share the knowledge in the areas of management and engineering which are applicable in the industry. It is held on Monday, 28 September 2020 in the campus of Swiss German University at Prominence Tower, Alam Sutera. The theme of this conference is "Bridging Technology Towards Industry 4.0". This theme is aligned with Master of Mechanical Engineering vision and mission to prepare our students for the era of Industry 4.0 in the global economic.

There are seven papers presented in this event with the topics related to the theme. We thank reviewers who have been working hard to improve the quality of the papers until this conference proceeding ready to be published on time. We thank all the members of the committee who prepare and run the event. We thank Rector, Vice Rectors, and Dean of Faculty of Engineering and Information Technology for their support on this event.

We thank God that we have run the event of the conference smoothly and published the conference proceeding on time. We hope that this event is beneficial for everybody and also the proceeding to be beneficial for the readers.

Best Wishes,

Dena Hendriana, B.Sc., S.M., Sc.D.

**Editorial Team Advisors:**

Dr. Maulahikmah Galinium, S.Kom., M.Sc.

Dr. Ir. Gembong Baskoro, M.Sc

Dr. Ir. Henry Nasution, M. T.

**Chief Editor:**

Dena Hendriana, B.Sc., S.M., Sc.D.

**Secretariat:**

St. Ayu Diana Lestari, S.Pd.

**Treasurer:**

Anis Choirunnisa, S.T., M.Kom.

**IT Support for e-Journal:**

Maria Lamury, S.S., M.P.

Billy Siagian, S.Kom

**Reviewer:**

1. Dr. Ir. Henry Nasution, M. T. (Swiss German University)
2. Dena Hendriana, B.Sc., S.M., Sc.D. (Swiss German University)
3. Dr. Ir. Gembong Baskoro, MSc. (Swiss German University)
4. Dr. Ir. Hanny J Berkmans, M.Sc. (Swiss German University)
5. Dr. Ir. Widi Setiawan (Swiss German University)
6. Edi Sofyan, B.Eng., M.Eng., Ph.D (Swiss German University)
7. Dr. Ary Syahriar (Universitas Al Azhar Indonesia)
8. Dr. Ir Dedy Loebis, MBA, M.Sc. (Swiss German University)
9. Dr. Yunita Umniyati, S.Si., M.Sc. (Swiss German University)
10. Dr. Rusman Rusyadi (Swiss German University)
11. Leonard P. Rusli, B.Sc., M.Sc., Ph.D. (Swiss German University)
12. Dr. Eng Cuk Supriyadi Ali Nandar (Agency for the Assessment & Application of Technology - BPPT)
13. Dr. Tanika D. Sofianti, S.T., M.T. (Swiss German University)
14. Dr. Eng. Sumarsono, S.T., M.T. (Universitas Mercu Buana)

## CMEI 2020 PROGRAM

**Monday, 28 September 2020**

Time	Location	Activities
08.00 – 09.00		Zoom Preparation
<b>Opening</b>		
09.00 – 09.05	Zoom Meeting Room 1	Opening
09.05 – 09.10		National Anthem: Indonesia Raya
09.10 – 09.15		Report by Chairperson
09.15 – 09.20		Report by Conference Chair
09.20- 09.30		Welcoming Address by the Rector
<b>Keynote Session</b>		
09.30 – 10.05	Zoom Meeting Room 1	Keynote Speaker : <b>Prof. Bambang PS Brodjonegoro, Ph.D</b> , Minister of Research and Technology – BRIN, INDONESIA

### CMEI Parallel Session

Time	Presenter	Title
10.40 – 11.00	Sri Sadono, Cuk Supriyadi Ali N, Dena Hendriana, Henry Nasution, Gembong Baskoro	Modeling, Simulation, and Analysis of Auto Warming Up and Overheat Prevention System in Komatsu Hydraulic Excavator PC 200-8
11.00 – 11.20	Sutiawan, Dena Hendriana, Hanny J. Berchmans, Henry Nasution, Gembong Baskoro	Design and Analysis of Warning System for Aircraft Wingtip Proximity to Hangar Column using Ultrasonic Sensor
11.20 – 11.40	Yoki Andriawan Ramdan, Dena Hendriana, Henry Nasution, Gembong Baskoro	Bench Set Impact Analysis on Fail-Safe Condition of Fail to Closed Type Control Valve with Spring-Diaphragm Actuator
11.40 – 12.00	Daniel Christianto, Cuk Supriyadi Ali Nandar, Widi Setiawan	Development of Centrifugation Straining Control System for Greek Yogurt Production Based on Weight of Whey Drain
12.00 – 13.00	<b>Lunch Break</b>	
13.00 – 13.20	Yohanes Acep Nanang Kardana, Hanny J. Berchmans, Cuk Supriyadi Ali Nandar, Henry Nasution, Dena Hendriana,	Fuel Level Monitoring and Security Warning Tools using IoT for Komatsu Excavator PC200-8M0
13.20 – 13.40	Tri Randi Utama, Widi Setiawan, Edi Sofyan	Performance Comparison of Real Time Image Processing Face Recognition for Security
13.40 – 14.00	Setyo Haryadi, Dena Hendriana, Henry Nasution, Gembong Baskoro	Monitoring of Thermostat Performance in Heavy Equipment Diesel Engine Cooling System Using an Ultrasonic Flow Meter

## Content

Preface from the Chairman of CMEI	ii
Editorial Team	iii
CMEI 2020 Program	iv
<b>Modeling, Simulation, and Analysis of Auto Warming Up and Overheat Prevention System in Komatsu Hydraulic Excavator PC 200-8</b> , <i>Sri Sadono, Cuk Supriyadi Ali N, Dena Hendriana, Henry Nasution, Gembong Baskoro.</i>	1
<b>Design and Analysis of Warning System for Aircraft Wingtip Proximity to Hangar Column using Ultrasonic Sensor</b> , <i>Sutiawan, Dena Hendriana, Hanny J. Berchmans, Henry Nasution, Gembong Baskoro.</i>	7
<b>Bench Set Impact Analysis on Fail-Safe Condition of Fail to Closed Type Control Valve with Spring-Diaphragm Actuator</b> , <i>Yoki Andriawan Ramdan, Dena Hendriana, Henry Nasution, Gembong Baskoro.</i>	11
<b>Development of Centrifugation Straining Control System for Greek Yogurt Production Based on Weight of Whey Drain</b> , <i>Daniel Christianto, Cuk Supriyadi Ali Nandar, Widi Setiawan.</i>	15
<b>Performance Comparison of Real Time Image Processing Face Recognition for Security System</b> , <i>Tri Randi Utama, Widi Setiawan, Edi Sofyan.</i>	21
<b>Monitoring of Thermostat Performance in Heavy Equipment Diesel Engine Cooling System Using an Ultrasonic Flow Meter</b> , <i>Setyo Haryadi, Dena Hendriana, Henry Nasution, Gembong Baskoro.</i>	26
<b>Fuel Level Monitoring and Security Warning Tools using IoT for Komatsu Excavator PC200-8M0</b> , <i>Yohanes Acep Nanang Kardana, Hanny J. Berchmans, Cuk Supriyadi Ali Nandar, Henry Nasution, Dena Hendriana.</i>	31



# Monitoring of Thermostat Performance In Heavy Equipment Diesel Engine Cooling System Using An Ultrasonic Flow Meter

<sup>1,2</sup> Setyo Haryadi

<sup>1</sup> United Tractor, Cakung, Jakarta - Indonesia

<sup>2</sup> Master of Mechanical Engineering  
 Swiss German University  
 Tangerang City, Indonesia  
 sharyadi@unitedtractors.com

Henry Nasution

Master of Mechanical Engineering  
 Swiss German University  
 Tangerang City, Indonesia  
 henry.nasution@sgu.ac.id

Dena Hendriana

Master of Mechanical Engineering  
 Swiss German University  
 Tangerang City, Indonesia  
 dena.hendriana@sgu.ac.id

Gembong Baskoro

Master of Mechanical Engineering  
 Swiss German University  
 Tangerang City, Indonesia  
 gembong.baskoro@sgu.ac.id

**Abstract**—Heavy equipment uses diesel engines as the main power source. Common problem in diesel engines is engine overheat condition and the cause of this problem can come from thermostat failure. Diagnosis of the thermostat when problem occurs in the diesel engine cooling system requires a long time. This study aims to determine the condition of the coolant flow and monitor thermostat performance while engine is running so thermostat failure can be detected earlier. In this study, an ultrasonic flow meter to measure coolant flow rate in the diesel engine cooling system was developed and the measurement is displayed for monitoring the condition of thermostat. The monitoring system has been installed and the results showed significant relationship between the coolant flow rate and the performance of the thermostat. This monitoring system can show that when the thermostat is in normal condition and when the coolant temperature reaches 80°C, it is detected that the coolant flow rate from the engine block to the radiator increases significantly.

**Keywords**—ultrasonic flow meter, thermostat, coolant flow, cooling system, diesel engine, heavy equipment

## I. INTRODUCTION

Heavy equipment or sometimes called construction machinery is a heavy duty vehicle specifically designed to be able to carry out construction tasks that mostly involve material work operations. Most of the heavy equipment works by a hydraulic system [1]. The population of heavy equipment in Indonesia is quite large. According to Komatsu heavy equipment data from 2005 to 2019, 58,387 units of heavy equipment were sold [2]. The heavy equipments are expected to be in good performance, so it can operate continuously and their production targets can be achieved and according to plan. To achieve this situation, a good procedure and management of machine maintenance

is needed but heavy equipment breakdown is not uncommon. Fig. 1 shows several technicians handling a heavy equipment that was damaged while operating in the field and this will reduce the productivity of the machine.



Fig. 1. Several technicians are handling a bulldozer that was damaged while operating in the field.

The majority of construction equipment uses diesel engines as its main driving source based on several advantages compared to other engine types, including: better fuel economy, lower maintenance and greater power. One of the problems that often occur in heavy equipment diesel engines is cooling system problem. The cooling system of the diesel engine is very important, where the main function of this cooling system is to regulate the temperature in the diesel engine [3]. There are two types of cooling systems used in modern engines, they are air cooling systems and liquid cooling systems. The choice of these two types of cooling systems is determined by several factors, including the ambient air temperature, location, and the purpose of the machine [4]. The cooling

system in modern diesel engines generally uses a type of liquid cooling system, including those used in heavy equipment or construction machinery.

Engine cooling system can have overheating or overcooling problems. Overheating problem of the engine can cause pre-ignition, detonation, knock, burned pistons and valves and lubrication failure. Meanwhile, overcooling engine can cause unnecessary wear, poor fuel economy, accumulation of water and sludge in crankcase [5].

When engine cooling system problem occurs, the technician must check one by one the components in the cooling system and to ensure their condition to be normal. Inspections are carried out either visually (without dismantling components) or by conducting direct tests on the components. Thermostat is one component of the cooling system that is vulnerable and often gets damaged. Thermostat has a valve that heat-sensitive and it will open to let the coolant flows to the radiator when the coolant temperature in the cylinder head reaches a predetermined temperature. Most thermostat will open at 87.8°C [6]. When the thermostat is damaged, the coolant flow will be interrupted, so that the cooling process in the engine cannot run normally. When there is a problem in the cooling system, the technicians commonly suspect thermostat failure and to check the thermostat condition, it requires from 2 to 3 hours to do.

Prolonged inspection and testing of the thermostat is undesirable, as it can reduce machine productivity. It would be better if the process of checking the thermostat can be carried out without dismantling other components, such as checking the flow rate of coolant in the engine cooling system. This study attempts to do so.

## II. METHODS

### A. Coolant Flow Rate Monitoring System

The development of ultrasonic coolant flow meter monitoring system is done in this study to continuously measure coolant flow rate to the radiator and it can identify the thermostat condition. Testing of the monitoring system was carried out on a medium-sized Komatsu bulldozer. This bulldozer is equipped with a power source in the form of a diesel engine Komatsu 6D125 series with a capacity of 11,000 cm<sup>3</sup> with a flywheel power of 165 HP [7].

This study uses a TDS-100F series ultrasonic flow meter. The main board of the TDS-100F series ultrasonic flow meter is suitable for all transducers type including clamp type, insertion type, in-line type, and other types of transducers. Pipe parameters and calibration parameters of water meters and in-line pipes are input by manufacturer. Users do not need to input any parameters, and only need to connect the flowmeter to work. This ultrasonic flow meter is able to measure the liquid in the pipe which has a temperature up to 160°C and suitable for measuring flow rates in pipes diameter of 50 mm to 700 mm.

Arduino is a microcontroller board designed with the main objective to facilitate research or realization of various microcontroller-based equipment [8]. In this

study, the Arduino Uno board with ATmega32, 14 digital as input/output and 6 pins analog input was used as the control board. The RS-485 was used to connect the main board of the ultrasonic flow meter to the Arduino board.

Water temperature sensor was used to measure the temperature of the coolant in a diesel engine. The type of temperature sensor is a sensor commonly used in Komatsu diesel engine cooling systems or heavy equipment, as shown in Fig. 2 below.



Fig. 2. Coolant temperature sensor.

This temperature sensor is a continuous function device that changes the inverse resistance to temperature. This temperature sensor can be used to measure oil, fuel, water or engine coolant temperatures and provide a signal to the powertrain control module. Similar temperature sensor was used to monitor coolant temperature in Komatsu excavator combined with Internet of Things [9]. This water temperature sensor has technical specifications capable of measuring liquid temperatures up to 120°C, so it is suitable for the use in this study where the coolant temperature in the diesel engine is up to 110°C.

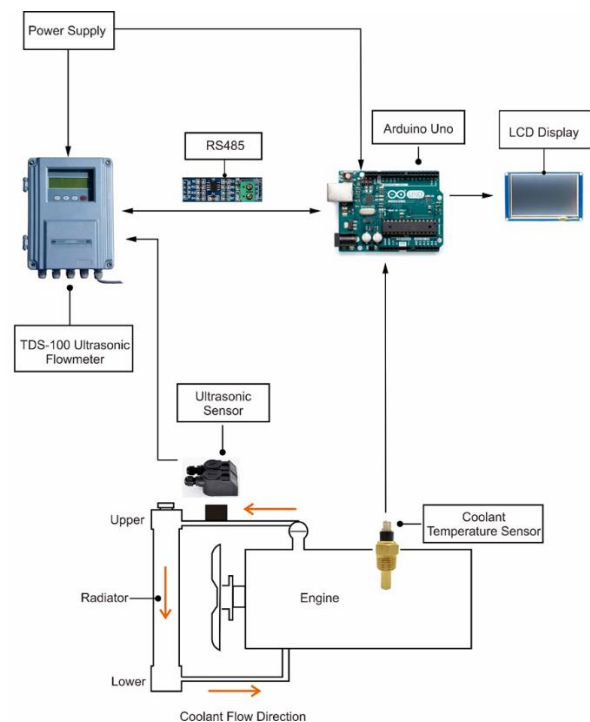


Fig. 3. Block diagram for coolant flow rate monitoring system on diesel engine cooling system.

Fig. 3 shows a block diagram for coolant flow rate monitoring system on diesel engine cooling system. The

coolant temperature sensor is directly mounted on the duct in the engine. This temperature sensor will directly measure the coolant temperature in the engine.

The TDS-100F series used in this study is a transit-time ultrasonic flow meter type. The principle of measurement on ultrasonic flow meters can be explained as follows: the travel time for acoustic waves from the upstream transducer to the downstream transducer (A to B) is shorter than the time required for the same wave at the downstream transducer to the upstream transducer (B to A). The greater the difference, the higher the flow speed [10]. Fig. 4 shows the principle of ultrasonic transit time flow meter.

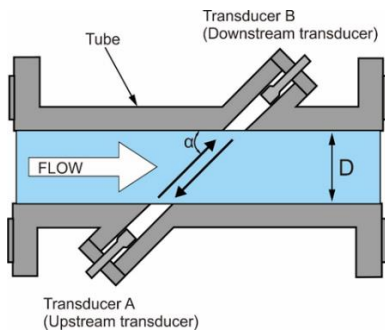


Fig. 4. Ultrasonic transit time flow meter.

If  $C$  is velocity of sound and  $V$  is flow velocity, a pulse travelling with the current from transducer A to B needs a transit time of:

$$T_{A \rightarrow B} = \frac{D}{\sin(\alpha)} \cdot \frac{1}{\{C + V \cos(\alpha)\}} \quad (1)$$

A pulse travelling against the current from transducer B to A needs a transit time of:

$$T_{B \rightarrow A} = \frac{D}{\sin(\alpha)} \cdot \frac{1}{\{C - V \cos(\alpha)\}} \quad (2)$$

The time difference between the two pulses becomes:

$$\Delta T = T_{B \rightarrow A} - T_{A \rightarrow B} = V \cdot \frac{T_{B \rightarrow A} \cdot T_{A \rightarrow B} \cdot \sin(2\alpha)}{D} \quad (3)$$

$$V = \frac{D}{\sin(2\alpha)} \cdot \frac{T_{B \rightarrow A} - T_{A \rightarrow B}}{T_{B \rightarrow A} \cdot T_{A \rightarrow B}} \quad (4)$$

or if the distance between transducers is known, then it can be written using the simple formula [11]:

$$V = \frac{L}{2} \cdot \frac{T_{B \rightarrow A} - T_{A \rightarrow B}}{T_{B \rightarrow A} \cdot T_{A \rightarrow B}} \quad (5)$$

where  $L$  is the transmitter–receiver separation.

The ultrasonic flow meter on transit time is reported to be very suitable and works very well on relatively clean water measurements that enable signal transmission to work properly [12]. There are several methods of installing the flow meter transducer. Determining the installation location of the transducer pair will have a direct impact on the accuracy of the measurements. There

are three methods of installing transducers on transit-time ultrasonic flow meter. The three methods are direct transmission (Z-method), single reflection (V-method), and double reflection (W-Method). From the three methods above, the Z method and the V methods are the most commonly used. In this study, we installed ultrasonic transducers using the V method, see Fig. 5.

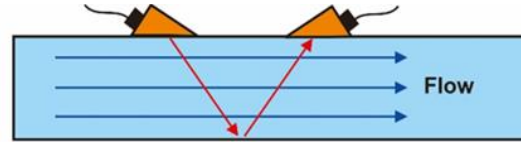


Fig. 5. V-method

### B. Thermostat Characteristic

The characteristics of the thermostat is very important to know to control the temperature in the diesel engine cooling system. The size or capacity of the engine, application of engine, and various other factors certainly make a consideration of each diesel engine manufacturer to use a thermostat with certain characteristics. This is necessary to get optimal engine performance.

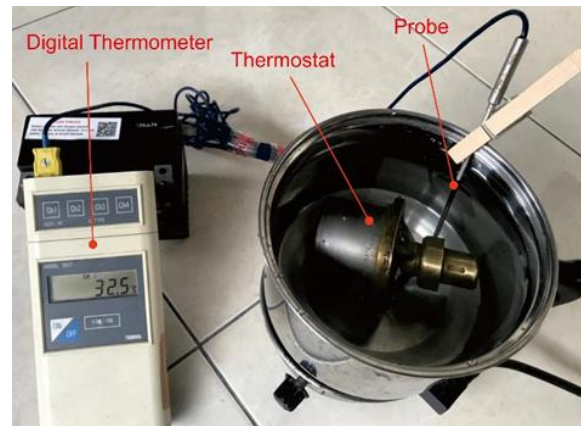


Fig. 6. Preparatory conditions for thermostat character testing.

To find the performance of the thermostat, we immerse the thermostat in a container filled with water as in the engine cooling system. Furthermore, the water in the container is heated to a temperature of 90°C. Fig. 6 shows that when the water temperature is the same as the ambient temperature, the thermostat valve is completely closed. This condition is an indication that the thermostat is in a good condition (not jammed open). The condition of the thermostat valve in fully opened after the water is heated and reaches temperature of 90°C. This indicates that the thermostat is fully functional.

## III. RESULT AND DISCUSSION

Based on the test results, it shows that the valve on the thermostat starts to open at 72°C as the valve opening is visible and can be measured using a taper gauge and successively widens the gap until the temperature of 90°C reaches the maximum valve gap (valve lift) of 10 mm. Fig. 7 shows the characteristic curve of the thermostat. The curve is a characteristic of the thermostat in conditions



receiving treatment from cold to hot conditions gradually. The results show that the rate of valve rise in the thermostat tends to be slow at the beginning and end of the curve.

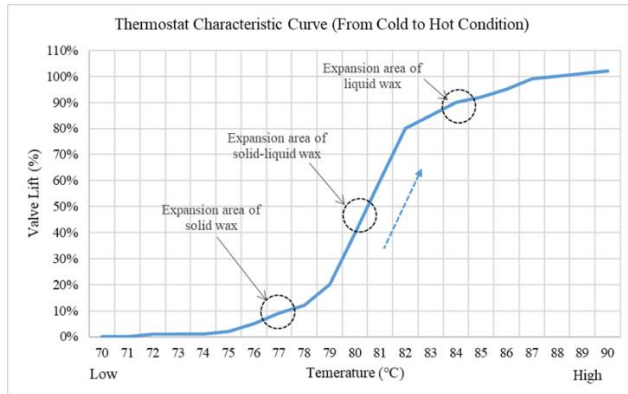


Fig. 7. Thermostat characteristic curve tested in a bucket of heated water from cold to hot condition.

The thermostat characteristic curve can actually be divided into 3 phases or areas, namely: (1) expansion area of solid wax, (2) expansion area of solid-liquid wax, and (3) expansion area of liquid wax. The formation of the areas on the thermostat characteristic curve is highly determined by the wax characteristics possessed by each thermostat, so that each thermostat will have a different curve.

When the wax element is heated, the paraffin wax phase changes from solid to liquid. This condition causes the wax volume expansion to push the pin and the force generated will be used to push the spring and open the thermostat valve [13]. The thermostat used for this study has the characteristics where the expansion area of solid wax occurs in the temperature range of 70°C to 79°C, for the expansion area of solid-liquid wax in the temperature range 79°C to 82°C, and the expansion area of liquid wax in the temperature range 82°C and above. In the expansion area of solid wax, the thermostat valve opens as high as 20% (from valve lift 0% to 20%), while in the expansion area of solid-liquid wax, the thermostat valve opens as high as 60% (from valve lift of 20% to 80%), and in the expansion area of solid, the valve opens as high as 20% (from valve lift of 80% to 100%).

Fig. 8 shows the installation of ultrasonic transducer on one of the heavy equipment. Ultrasonic transducer is installed on the hose with the V method with the distance between the transducer (upstream and downstream) about 10 mm. Fig. 9 shows coolant flow rate in the cooling system of the heavy equipment. Horizontal axis on the graph is the value of coolant temperature in the range of 70°C to 90°C and the vertical axis is the value of the coolant flow rate from the ultrasonic transducer measurement. This graph shows the relationship between changes in coolant temperature to changes in coolant flow rate in the diesel engine cooling system.

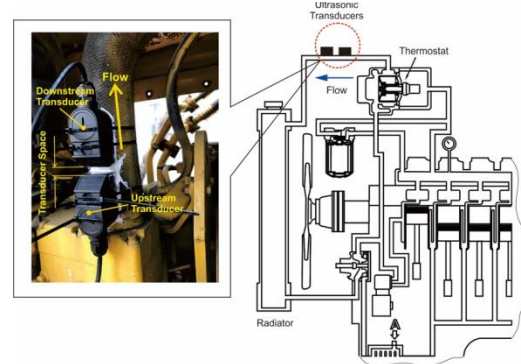


Fig. 8. Installation of ultrasonic transducer on the cooling system hose.

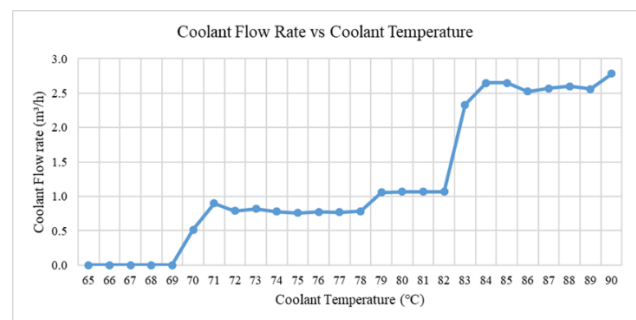


Fig. 9. Engine coolant flow rate as a function of engine temperature.

The graph shows that the coolant flow rate starts to open at coolant temperature of 70°C. At coolant temperature range of 71 to 78°C, the average coolant flow rate is about 0.80 m³/h, and slightly increase when the coolant reaches a temperature of 79°C, which is around 1.06 m³/h. A significant increase of coolant flow rate occurs when the coolant is at a temperature of 83°C, which is 2.33 m³/h. In this temperature range, the thermostat is the expansion area of the solid-liquid wax. The thermostat valve is easily pushed by the plunger to be opened. Coolant flow rate is stable at average value of 2.58 m³/h until the coolant temperature 90°C is reached. In this condition the thermostat is in the expansion area of the liquid wax. The thermostat valve only increases the valve height by 20% (from 80 to 100%).

The test results show that the ultrasonic transducers can measure coolant flow rate to show the condition of the thermostat. If the engine temperature is high, but the coolant flow rate is low, then we know that the thermostat fails. With this information, the technicians will know the condition of the thermostat and don't have to dismantle the thermostat to check its condition.

#### IV. CONCLUSION AND RECOMENDATION

##### A. Conclusion

The test results show that the ultrasonic flow meter can detect the coolant flow rate in the diesel engine cooling system. When the coolant temperature reaches a certain temperature, the thermostat valve starts to open so the coolant flow in the engine block can flow towards the radiator through a hose leads to the upper tank, the

ultrasonic flow meter will be able to detect the coolant flow rate in the hose. If the coolant is still cold, the thermostat valve is closed and no coolant flow enter into the radiator, the ultrasonic flow meter will detect it.

The condition of the thermostat's performance had a significant influence on the coolant flow rate. With detecting the coolant flow rate using an ultrasonic flow meter, we can monitor the performance conditions of the thermostat.

The ultrasonic flow meters can be used as one of the diagnostic tools that will help technicians when troubleshooting diesel engine cooling systems without having to disassemble and test the thermostat directly. Thus the machine breakdown time can be reduced.

#### B. Recommendation

There are some things that still need to be improved and further developed in order to obtain more accurate data and test equipment to optimal functions, in accordance with existing conditions in the field. The following are some recommendations that can be done to optimize this research:

The similarity of the thermostat components that are tested for their characteristics with those installed on the diesel engine which is measured by the coolant flow rate will increase the accuracy of the correlation data between the thermostat's performance with the coolant flow rate conditions.

The use of smaller test equipment with compact dimension design will make it easier retrieving data and more easily accepted by users when it be used in the field.

#### REFERENCES

- [1] S. Khattak, Rahman, Maqsood, Ullah, Akhtar, Nawaz, "Maintenance system for heavy earth moving equipment," *J. Eng. Appl. Sci.*, 34 (2), pp. 47–53, 2015.
- [2] U. Tractors, *Unit Population*, 2019.
- [3] A. Z. M. Fathallah, W. Busse, and F. R. Clausthaldi, "Fluid flow analysis of jacket cooling system for marine diesel engine 93 kW," *Int. J. Mar. Eng. Innov. Res.*, 1 (2), pp. 39–45, 2017.
- [4] A. Save, A. Kakirde, and S. Sharma, "Advanced engine cooling system design through addition of thermostat," *Int. J. Eng. Sci. Res. Technol.*, 8, 2019.
- [5] J. Deere, *Engine: Fundamentals of Service*, 10<sup>th</sup> ed. John Deere Publisher, 2009.
- [6] P. Dempsey, *Troubleshooting and Repairing Diesel Engines*, Fourth. New York: McGraw-Hill, 2008.
- [7] Komatsu, *Shop Manual D85E-SS-2A*. Komatsu, 2002.
- [8] A. Kadir, *From Zero To A Pro: Arduino*, 2<sup>nd</sup> ed. Yogyakarta: ANDI, 2018.
- [9] J. D. Sembiring, G. Baskoro, H. J. Berchmans, "Design and simulation of engine operation temperature monitor and control system by using internet of things," 1<sup>st</sup> Proceedings of The Conference on Management and Engineering in Industry (CMEI 2019), vol. 1, pp. 9-12, Tangerang, Indonesia, August 2019.
- [10] F. Hofmann, *Fundamentals of Ultrasonics Flow Measurement For Industrial Application*. Krohne, 2001.
- [11] M. Willatzen and H. Kamath, "Nonlinearities in ultrasonic flow measurement," *Flow Meas. Instrum.*, 19 (2), pp. 79–84, 2008.
- [12] B. Masasi and R. S. Frazier, "Review and Operational Guidelines for Portable Ultrasonic Flowmeters," Oklahoma State University, pp. 1–8, 2017.
- [13] C. Srinivasan, C. Zhang, H. Gao, D. M. Wang, and J. Slike, "Modeling of phase change within a wax element thermostat embedded in an automotive cooling system," *SAE Int. J. Engines*, 10 (2), pp. 181–195, 2017.



**CMEI**  
Conference on Management and Engineering in Industry

# CMEI-2020

## CALL FOR PAPERS

### Conference on Management and Engineering in Industry

**28 - 29 September 2020 at SGU, Tangerang**

In conjunction with the ICONIET 2020, the **Master of Mechanical Engineering (MME)** will conduct their second annual conference called Conference on Management and Engineering in Industry (CMEI). The theme of the conference is "**Bridging Technology Towards Industry 4.0**" and also open for related research topics, such as:

- Robotics
- Sensors and Actuators
- Intelligent System
- Instrumentation
- Mechatronics
- Machine Learning
- Innovation Technology Management
- Knowledge Management
- Strategic & Leadership Management
- Sustainable Project Management
- Operation & Supply Chain Management
- Technopreneurship

Important Dates:

**Full Paper Submission: 11 September 2020**

Acceptance Results: 16 September 2020

Re-submission for Camera Ready: 22 September 2020

---

For more details, please send an email to the conference committee [cmei2020.sgu@gmail.com](mailto:cmei2020.sgu@gmail.com)

